

Guards

STRAIGHT & FLARED



U-Cable Guards

For the protection of rising cable at the lower end of poles. Made from Hot dip galvanized 14 gauge Steel or 1100 grade aluminum to C.S.A. drawing No. G-3, specification C-83. Made in 2 styles: Straight (UC & UCA) and flared (UCG & UFA). Flared design will fit over underground duct without the need of an adapter. Throat clips (ATC) to round off sharp edges at the top of cable guards are also available.

Cat. No. (steel)	Cat. No. (Aluminum)	L	W	Std.Pkg.	Wt.-lbs./ C (Steel)	Wt.-lbs./ C (Aluminum)
Straight Cable Guards (UC & UCA):						
534UC	534UCA	5'	3/4"	5	330	110
834UC	834UCA	8'	3/4"	5	530	176
5114UC	5114UCA	5'	1.1/4"	5	440	146
8114UC	8114UCA	8'	1.1/4"	5	760	273
5214UC	5214UCA	5'	2.1/4"	5	900	300
8214UC	8214UCA	8'	2.1/4"	5	1300	433
5314UC	5314UCA	5'	3.1/4"	5	1100	366
8314UC	8314UCA	8'	3.1/4"	5	2000	666
5334UC	5334UCA	5'	3.3/4"	3	1500	500
8334UC	8334UCA	8'	3.3/4"	3	2160	720
8414UC	8414UCA	8'	4.1/4"	3	2800	933
Flared Cable Guards (UCF & UFA):						
5114UCF	5114UFA	5'	1.1/4"	5	460	153
8114UCF	8114UFA	8'	1.1/4"	5	840	280
5214UCF	5214UFA	5'	2.1/4"	5	930	310
8214UCF	8214UFA	8'	2.1/4"	5	1300	443
5314UCF	5314UFA	5'	3.1/4"	5	1540	513
8314UCF	8314UFA	8'	3.1/4"	3	1850	620
8334UCF	8334UFA	8'	3.3/4"	3	2450	816
8414UCF	8414UFA	8'	4.1/4"	3	3010	1029
85UCF	85UCF	8'	5"	3	3200	1100
11UF	—	29.5"	11.417'	1	3010	N/A

Other sizes available upon request.
Custom flares available upon request.



8214UC



8214UFA



8214UCF



11UF

GUARDS



Guard Straps

STRAPS

Straps


Galvanized and Aluminum

Straps		L	W	Std.Pkg.	Wt.-lbs./ C (Steel)	Wt.-lbs./ C (Aluminum)
Cat.No. (Steel)	Cat.No. (Aluminum)					
Straps (SUC & SCA):						
34SUC	34SCA	3/4 x 1/8	3/4"	200	12	4
114SUC	114SCA	3/4 x 1/8	1 1/4"	200	15	5
214SUC	214SCA	1 x 1/8	2 1/4"	100	24	8
314SUC	314SCA	1 x 3/16	3 1/4"	100	60	20
334SUC	334SCA	1 x 3/16	3 3/4"	50	70	23
414SUC	414SCA	1 x 3/16	4 1/4"	50	80	26
50SUC	50SCA	7/8	5"	25	90	30

Other sizes available upon request.



214SCA

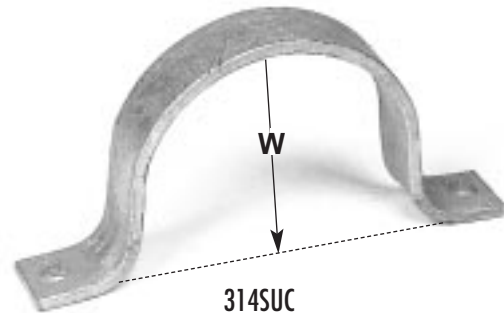

314SUC

Aluminum Throat Clip (ATC)

Cat. No.	Size	Std.Pkg.	Wt.-lbs/ C
114ATC	used on 1 1/4" guard	50	15
214ATC	used on 2 1/4" guard	50	25
314ATC	used on 3 1/4" guard	25	62
334ATC	used on 3 3/4" guard	25	69



314ATC